

Quadro^{2x}

THE GLOBAL PHONE NETWORK IN A BOX



Quadro2x: The IP PBX with 1 FXO Port, 2 FXS Ports and 2 IP Phones

The Quadro2x is the fully-featured IP PBX for home offices and teleworkers. Connected by one FXO line to the PSTN and over 10Base-T Ethernet to the Internet, the Quadro2x allows the attachment of two FXS phones and two fully-featured LAN IP phones (SIP/MGCP). Additional virtual extensions provide further functionality, e.g., registering at various SIP servers.

In addition, all extensions assigned to a line may be mirrored and act as remote IP extensions. Wherever you are, calls will reach you, and you will be able to make calls as if you were in your office.

Fully-Featured IP PBX

The Quadro2x offers a multitude of features including extensive PBX functionality, integrated voicemail, cost saving call routing functionality, IP routing, SIP call signaling and much more.


Integrated Internet Access Router

The Quadro2x IP PBX embodies a fully-fledged Internet access router with firewall security, including NAT, policy and

service based filtering. An extensive IPsec VPN functionality with DES, 3DES and AES encryption makes an additional contribution to data security.

VoIP Carriers

The Quadro2x IP PBX is easily applicable for VoIP Carriers as well as small businesses. For VoIP carriers, a special wizard has been implemented that facilitates the configuration of Quadro2x to work according to individual requirements.

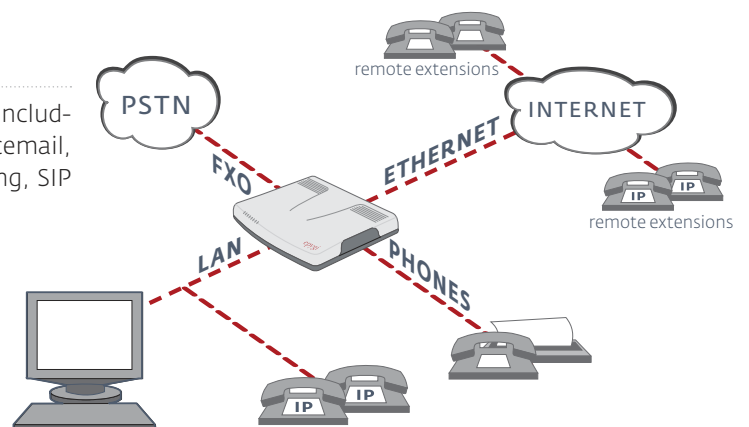

epygi.

Telephony

Voice Features

Voice Coding G.711, G.723 (5.3, 6.3 kbit/s), G.726 (16, 24, 32, 40 kbps),
G.729, iLBC (13, 33 kbit/s, 15, 2 kbit/s);
(RFC 3951, ITU-T: G.711, G.723, Annex A, G.726, G.729 Annex A; IETF;
ITU-T Q.23, Q.24, Bellcore GR.506, GR.181; ITU-T G.168-2000, 2002; ETS_300659_1,2,3)
NAT traversal (both manually and STUN)
VAD, CNG, G.168 echo cancellation
Lifeline POTS (single line)

Bandwidth Requirements

Per call WAN bandwidth requirements for the following codecs (non-encrypted/VPN encrypted):

G.711/G.711u	20 msec	84 kbps/105 kbps
G.726-16	20 msec	37 kbps/59 kbps
G.726-24	20 msec	45 kbps/65 kbps
G.726-32	20 msec	52 kbps/74 kbps
G.726-40	20 msec	60 kbps/80 kbps
G.729a	20 msec	29 kbps/49 kbps
G.723 30 msec		21 kbps/34 kbps
iLBC	30 msec	27 kbps/41 kbps

PBX Features

Call block, forward, hold, ID, park, relay, transfer, wait
Voice mail
Multilevel auto attendant with Interactive Voice Response (IVR)
Distinctive ring, hold music, speed dialing
Many extensions ring
Call statistics
Do not disturb service
Unified messaging
3-way conferencing
Hotline service
T.38 fax, fax relay and clear channel fax
Unified Fax Messaging
Busy auto redial
Multiple user extensions (up to 32 physical/virtual/remote extensions)

Call Signaling

SIP on the WAN and LAN side (RFCs: 3261, 3263, 3265, 3311, 3428, 3515, 3842, 3856, 3891, 3892, 3581, draft-ietf-sip-session-timer-15, draft-ietf-sipping-dialog-package-05;
Presence: RFCs: 3842, 3856, 3863, draft-ietf-sipping-dialog-package-05)
SDP (RFC 2327)
RTP (RFCs: 1889, 1890, 2833, 3389, 3550, 3551, 3555, draft-ietf-avt-rfc2833bis-05, draft-ietf-avt-rtp-ilbc-05), in band and out of band signaling support
RTP Proxy
MGCP with support of the full MGCP business extensions and full screen and soft buttons control of the MGCP phones on the LAN side
(RFCs: 3149, 3435, 3660, draft-foster-mgcp-returncodes-01,
PKT-SP-EC-MGCP-10-040402)
Fax over IP (ITU-T: T.4, T.30, T.38, V.17, V.21, V.27 ter, V.29)

POTS Signaling

Loop start
FSK and DTMF Caller ID support

Connectivity

Extensions

Total 70 extensions including FXS phones (2), LAN IP phones (2), remote extensions (4) and virtual extensions
The virtual extensions allow e.g., registering on several SIP servers
4 remote extensions for any FXS extension and any LAN IP phone

LAN IP Phones

2 SIP/MGCP phones
Remote IP extensions may be enabled for both SIP/MGCP phones

System Capacity

8 simultaneous VoIP calls with external parties
Unlimited station to station calling for IP phones
Unlimited station to station calling for analog phones
1 PSTN call with external parties
2 simultaneous calls through a VPN

Premise Connections

2 short-loop FXS ports (RJ11)
1 Ethernet 10/100BASE-T port (RJ45)

Uplink Connection

1 FXO ports to the Central Office (RJ11)
1 Ethernet 10BASE-T (RJ45)
(Other Quadro IP PBX models offer also ISDN uplink connectivity. Please refer to the corresponding Technical Data Sheets.)

Billing

Radius Client (RFCs: 2865, 2866)

Internet

NAT address translation
STUN/NAT traversal (RFC 3489)
IPSec VPN with DES, 3DES and AES encryption in tunnel mode (RFCs: 2402, 2406, 2409)
PPTP/VPN
L2TP/VPN
Manual and automatic IKE key support
Firewall security via:
NAT (Network Address Translation)
Policy and service-based filtering
DHCP server on the LAN side
DHCP client on the WAN side
DNS server with forwarding functionality
SNTP (Simple Network Time Protocol) server/client for computer clock synchronization
PPPoE connection to the ISP with PAP/(MS)CHAP authentication
IP DIFFSERV for QoS
Mail client to send voice messages as e-mail attachments (wav) and system notifications
DNS (DYNDNS) support with third party
Port forwarding
Port translation

System

Management

Multilingual WEB interface accessible from LAN and WAN (HTTP/HTTPS), the WAN management access can be switched off
Password control
Remote diagnostics and software upgrade
VoIP Carriers wizard
Download/restore configuration
Legible and editable configuration files
Auto-configuration via TFTP
Reset button with factory reset option

Diagnostics/Testing

LEDs: Busy, Info, Fault, USB, LAN, WAN, Line 1, Line 2
IP Call Quality Rating
Remote testing and VoIP diagnostics
Power-up diagnostics
Loop-back testing

Environmental

Physical Dimensions

Desktop devices, wall-mountable:
Measurements: 19 x 16 x 4.5 cm
Weight: 360 g

Conditions

41°F - 104°F (5°C - 40°C) operating temperature
41°F - 140°F (5°C - 60°C) storage temperature
5% - 90% non-condensing humidity

Power Supply

Input 100 - 240 VAC; 50/60 Hz; 0.5 A
Output 12.0 VDC; 1.5 A

Regulatory Compliance

Safety: UL 60950; CSA 22;
EMC: FCC Part 15 Class B;
EN 55022 Class B, EN 55024;
Telecom: CTR21/TBR21

Certification:

For Australia, Brazil, Canada, European Community, Mexico, Russia, USA



Quadro IP PBX systems have undergone a rigorous testing procedure and are fully A-Tick compliant for use in Australia



Proudly distributed in Australia by



1800 817 807

telephony@alloy.com.au

www.alloy.com.au or http://telephony.alloy.com.au

Melbourne Office: 4/585 Blackburn Road, Notting Hill, VIC 3169
Canberra Office: 2/42 Geils Court, deakin, ACT 2600

